

IBEX66M-EiGER FULL BLACK

650/655/660/665/670

IBEX HIGH EFFICIENCY MONOCRYSTALLINE SOLAR MODULES WITH HALF CELL TECHNOLOGY

0+5

Positive power tolerance (0+5W) guaranteed



High performance under low light.
Works at cloudy, rainy days



The monolithic per cell structure technology (low resistance characteristics) is adopted (the maximum conversion efficiency of modules is up to 21.57%)



EXTREME WEATHER RATING. High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (3800 Pa)



Reduced resistance between cells Less micro cracks, higher output power



SUPER STRONG FRAME. The overflow tank is waterproof with double layers. Aluminum frame enhances the mechanical load strength by 10%

- ISO9001:2015: Quality Management System
- ISO45001:2018 Occupational health and safety management systems



IBEX66M-EIGER 650-670 FULL BLACK

MONOCRYSTALLINE SOLAR MODULE

ELECTRICAL DATA AT STC

	650	655	660	665	670
Rated power P _{mpp} [Wp]	650	655	660	665	670
P _{mpp} range to	0/+5W	0/+5W	0/+5W	0/+5W	0/+5W
Rated current I _{mpp} [A]	17.34A	17.38A	17.42A	17.46A	17.50A
Rated voltage V _{mpp} [V]	37.50V	37.70V	37.90V	38.10V	38.30V
Short-circuit current I _{sc} [A]	18.35A	18.39A	18.44A	18.48A	18.51A
Open-circuit voltage U _{oc} [V]	45.20V	45.40V	45.60V	45.80V	46.00V
Efficiency at STC up to	20.92%	21.09%	21.25%	21.41%	21.57%
Application Class	Class A	Class A	Class A	Class A	Class A

Specification as per STC (Standard test conditions): irradiance 1000 W/m² | module temperature 25°C | Air Mass = 1.5

ELECTRICAL DATA AT NOCT

	650	655	660	665	670
Power at P _{mpp} [Wp]	492.70	496.50	500.20	504.00	507.80
Rated current I _{mpp} [A]	14.05	14.08	14.12	14.15	14.18
Rated voltage V _{mpp} [V]	35.10	35.20	35.40	35.60	35.80
Short-circuit I _{sc} [A]	14.83	14.86	14.90	14.93	14.96
Open-circuit voltage U _{oc} [V]	42.30	42.50	42.70	42.90	43.10

NOCT (nominal operating cell temperature): irradiance 800 W/m² | Wind speed 1 m/sec | Ambient temperature | 20°C cell operating temperature 45 +/-2°C | Air Mass = 1.5

LIMITING VALUES

Max. system voltage [V]	1500V DC (IEC)
Max. return current [I]	30A
Operating Temperature	- 40 to +85°C
Max. tested pressure load [Pa] ²	5400
Max. tested tensile load [Pa] ²	3800

TEMPERATURE COEFFICIENT

I _{sc}	V _{oc}	P _{max}
0.05% /°C	-0.28% /°C	-0.35% /°C



SPECIFICATIONS

Number of cells	132 (6 x 22) 210x105 mm
Dimensions	2384x1303x35 mm
Weight	34.5 kg
Front-side glass	3.2 mm tempered Low Iron Glass
Frame	Stable, anodised aluminium frame, black
Junction box	Split Junction Box (IP68)
Cable	4 mm ² , +300mm,-300mm Cust.Length
Diodes	3 Diodes
Plug-in connection	MC4 Compatible
Hail test (max. hailstrom)	Ø45mm 23 m/s 83 km/h

PACKING CONFIGURATION

Container	40 HQ	Pieces Per Pallet	30
Pallets Per container	16	Pieces per Container	480

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance depending on equipment: rated power +/- 3%, other values +/- 10%. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals. 1 The specific warranty conditions are given under www.swissenergy-solar.ch | 2 Horizontal mounted | 3 Tolerance L/W = +/- 3 mm. H +/-2mm, the dimensions given in the order confirmation will be decisive | 4 Location and dimensions of holes on request

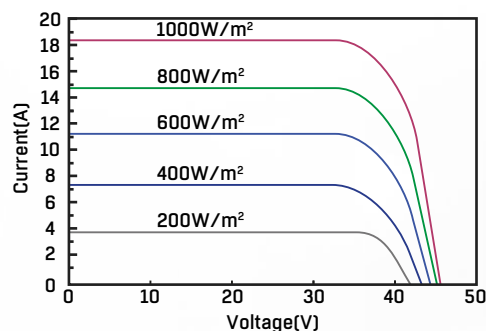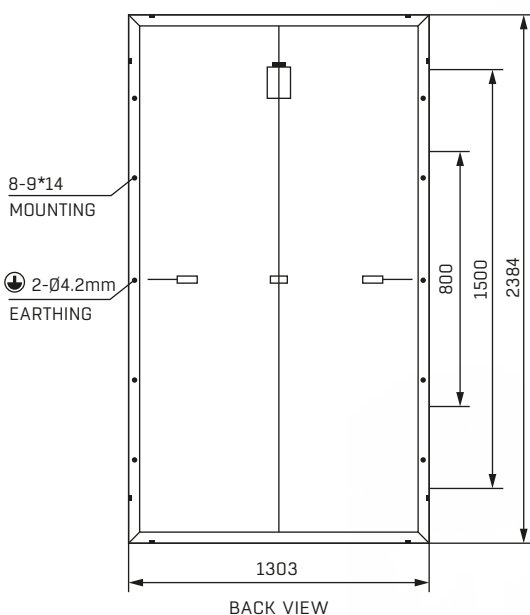

WARRANTY

20 YEARS
PRODUCT WARRANTY

30 YEARS
POWER WARRANTY

swiss solar

SWISSENERGY-SOLAR.CH